


Door Stations

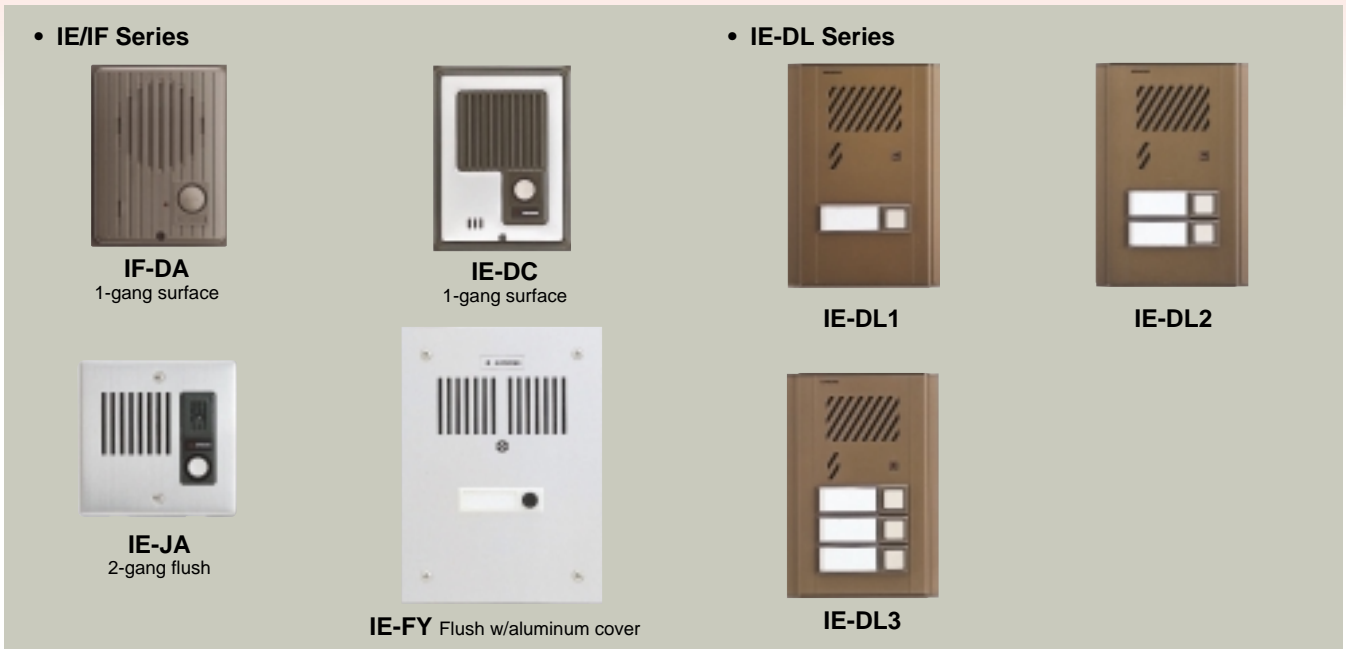

IE/IF Series

USED FOR

IE-1AD(U)
IE-1GD(U)
IE-2AD(U)
IE-2A2D(U)
IE-8MD
TD-nH/B w/DE-UR
(n = 3, 6, 12 & 24)
TB-M w/TB-AD1
TB-M w/TB-AD10

FEATURES

Audio only weather-resistant remote station.

Other possibilities


- At tenant door in VY-EM
- At multiple doors w/TB-ADM10 in lieu of video door.

SPECIFICATIONS


Wiring: 2 parallel wires to master, non-polarized
Wiring distance:

Diameter	0.65mmø	0.8mmø	1.0mmø
Distance	150m	230m	360m


IF-DA




IE-DC



IE-JA



IE-FY



Box: 185H x 128W x 66D

IE-DL Series

USED FOR

IE-1AD(U)
IE-1GD(U)
IE-2AD(U)
IE-2A2D(U)
IE-8MD
TD-nH/B w/DE-UR
(n = 3, 6, 12 & 24)

FEATURES

- 1 ~ 3-call surface-mount door station with aluminum panel.
- Directory back illumination.
- AC/DC power source.

SPECIFICATIONS

Power source: 12 ~ 16V AC, 140mA or 12 ~ 24V DC, 140mA.

Communication: Press CALL to ring a flat station. Talk handsfree after the inside station replies.

Wiring: 4 to 8 wires, polarized.
Wiring distance:

Diameter	0.65mmø	0.8mmø	1.0mmø
Distance	150m	230m	360m

