

Foyer Panel (IP)



Features

- 3.5-inch TFT screen
- Camera: 1.3 mega pixel camera
- Excellent night vision effect
- Aluminum die-casting construction plate
- Call indoor monitor and management centre
- Supports contacts call function
- Supports password and IC card
- Supports remote unlock
- Saves visitor audio and video function
- Supports extension A&C module


DAHI1040 (DH-VTO1220A)

Specifications

Model		DH-VTO1220A
System	Main Processor	Embedded micro processor
	Operation System	Embedded LINUX OS
Video	Video Compression Standard	H.264
	Input/Approaching Induction	1.3 megapixel CMOS camera
	Black Light	Supported
	Auto Light Compensation	Supported
Audio	Audio Input	Microphone
	Audio Output	Built-in speaker
	Bidirectional Talk	Supports dual-way bidirectional talk
Display	LCD Dimensions	3.5-inch TFT screen
	Resolution	320*240
Operation Mode	Input	Digital keyboard
	Card	Built-in IC card induction reader
Approaching Induction	Body Approaching	1 meter
Alarm	Vandal proof	Supported
Access Control	No Output	Supported
	NC Output	Supported
	Door on/off Button	Supported
	Door Status Detect	Supported
Network	Ethernet	10M/100Mbps Self-adaptive
	Network Protocol	TCP/IP
Storage	Memory	128MB
Others	Power	DC 10~15V
	Power Consumption	Standby ≤1W, work ≤10W
	Working Environments	-20°C – +60°C
		10% – 95%RH
	Dimensions	376.0mm*150.0mm*59.1mm (L*W*T)
Weight	1.6Kg	

DAHI1040 (DH-VTO1220A)

Dimensions

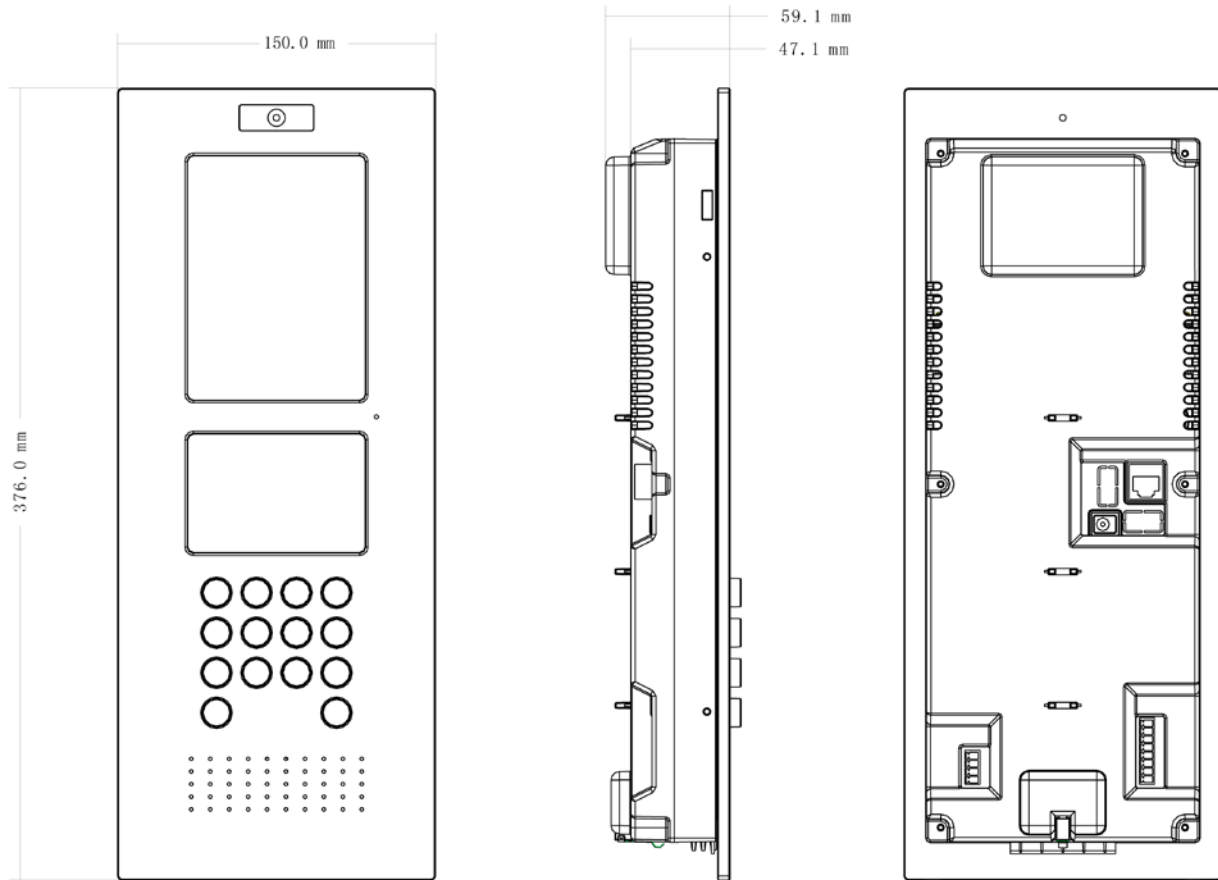

*Design and specifications are subject to change without notice.