

## DHU13505 (DH-IPC-HFW4800E)

4K Ultra HD Network Small IR-Bullet Camera



### Features

- 1/2.3" 4K progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 7fps@4K(3840×2160)
- DWDR, Day/Night(ICR), 3DNR,AWB,AGC,BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 4mm fixed lens
- Max. IR LEDs Length 30m
- IP66, PoE

# DHU13505 (DH-IPC-HFW4800E)


## Technical Specifications

<b>Model</b>	<b>DH-IPC-HFW4800E</b>	
<b>Camera</b>		
Image Sensor	1/2.3" 4K progressive scan CMOS	
Effective Pixels	3840(H)x2160(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/10000s	
Min. Illumination	0.1Lux/F1.6 (Color), 0Lux/F1.6(IR on)	
S/N Ratio	More than 50dB	
Video Output	N/A	
<b>Camera Features</b>		
Max. IR LEDs Length	30m	
Day/Night	Auto(ICR)/Color/B/W	
Backlight Compensation	BLC / HLC / DWDR	
White Balance	Auto/Manual	
Gain Control	Auto/Manual	
Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
<b>Lens</b>		
Focal Length	4mm	
Max Aperture	F1.6	
Focus Control	Manual	
Angle of View	H:80°	
Lens Type	Fixed lens	
Mount Type	Board-in Type	
<b>Video</b>		
Compression	H.264/ MJPEG	
Resolution	4K(3840×2160)3M(2048×1536)/1080P(1920×1080)/ 720P(1280×720) /D1(704×576/704×480) / CIF(352×288/352×240)	
Frame Rate	Main Stream	4K(1~7fps)/3M/1080P/ (1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 20K ~ 16Mbps	
<b>Audio</b>		
Compression	N/A	
Interface	N/A	
<b>Network</b>		
Ethernet	RJ-45 (10/100Base-T)	
Wi-Fi	N/A	
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
Compatibility	ONVIF,PSIA,CGI	
Max. User Access	20users	

## DHU13505 (DH-IPC-HFW4800E)

Smart Phone	iPhone, iPad, Android, Windows Phone
<b>Auxiliary Interface</b>	
Memory Slot	N/A
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
<b>General</b>	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<7.5W
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	178.4mm×70mm×69.9mm
Weight	528g(683.4g with packaging)

### Dimensions (mm)

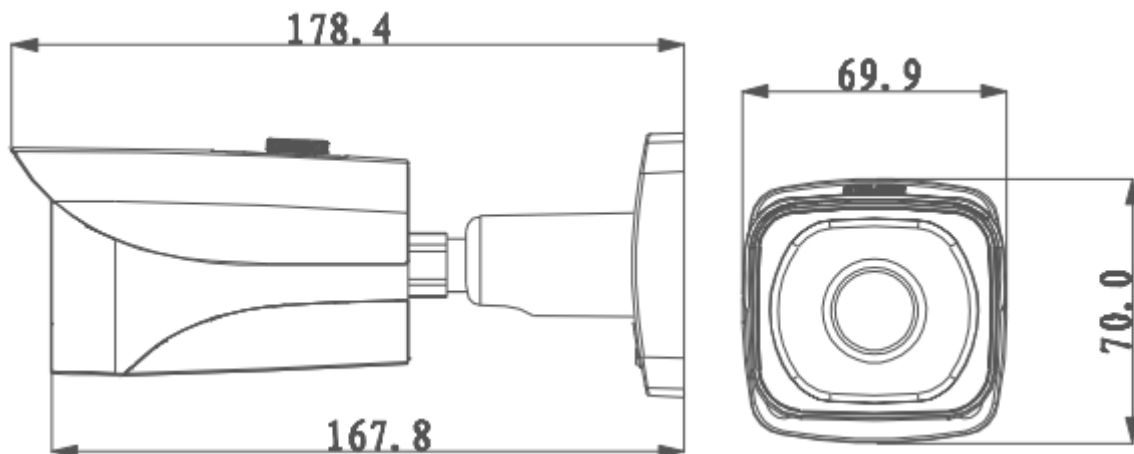

### Accessories (optional)

		
PFA121	PFA152	PFA151

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.